

MAXHUB UC P15

User Manual


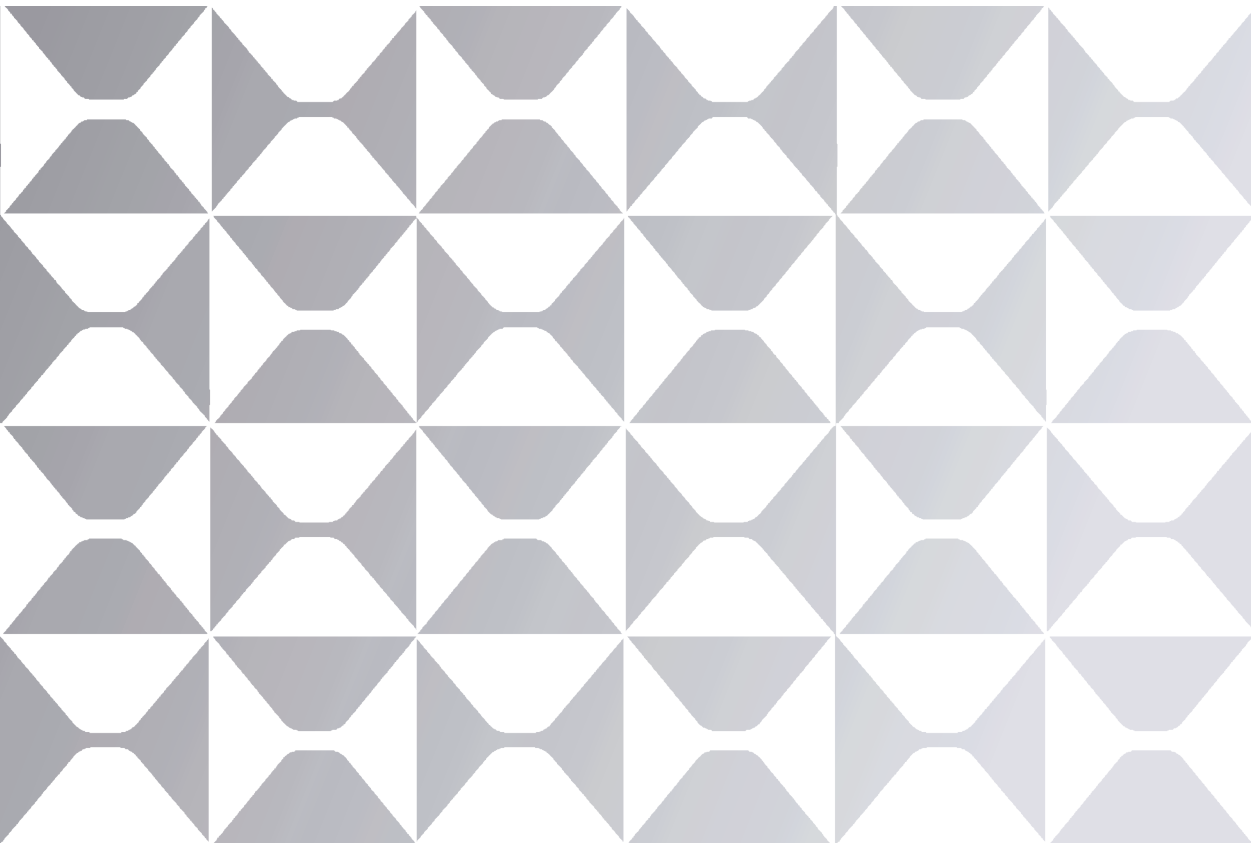


TABLE OF CONTENTS

Contents	01
1. Note	03
2. Packing List	04
3. Quick Start	05
4. About Product	06
4.1 Features	06
4.2 Product Specification	07
4.3 Interfaces and Buttons	09
4.4 Dimension	09
4.5 Remote Control	11
4.6 RS232 Interface	12
4.7 Serial Communication Control	12
5. GUI Settings	13
5.1 MENU	13
5.2 EXPOSURE	13
5.3 COLOR	14
5.4 IMAGE	15
5.5 P/T/Z	16
5.6 NOISE REDUCTION	17
5.7 SETUP	17
5.8 COMMUNICATION SETUP	18
5.9 RESTORE DEFAULT	18

6. Network Function	19
6.1 Operating Environment	19
6.2 Equipment Installation	19
6.3 Internet Connection	19
6.4 Camera Controlled by LAN	19
6.4.1 Setup IP Address	19
6.4.2 Visit/Access Camera	21
6.5 Camera Controlled by WAN	22
6.5.1 Setup IP Controlled by Dynamic DNS	22
6.5.2 Camera Visiting via Dynamic DNS	23
6.5.3 VLC Stream Media Player Monitoring	23
6.6 Camera Parameter Setup	24
6.6.1 Homepage Introduction	24
6.6.2 Video Settings.	26
6.6.3 Image Settings	28
6.6.4 Audio Settings	29
6.6.5 System Settings	29
6.6.6 Network Settings	30
6.6.7 Device Information	32
6.7 Download the Network Upgrade Program	32
7. Maintenance and Troubleshooting	32

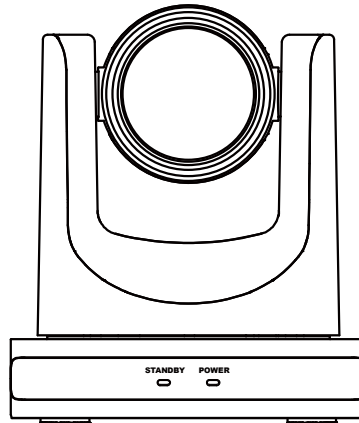

Note: All the pictures in this manual are for reference only, please refer to the actual product.

1. Note

- **Electric Safety**


Installation and operation must accord with electric safety standard.

- **Caution to Transport**

Avoid stress, vibration orsoakage in transport, storage and installation.

- **Polarity of Power Supply**

The power supply of this product is DC 12V,polarity of the power supply plug drawing shows as below.

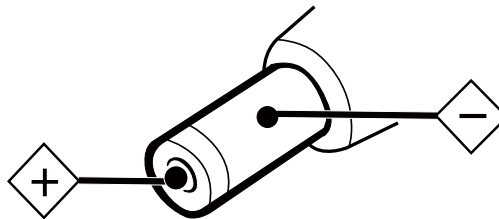

- **Installation Precautions**

Do not grasp the camera lens when carrying it. Don't touch camera lens by hand. Mechanical damage may be caused by doing so.Do not use in corrosive liquid, gas or solid environment to avoid any cover (plastic material) damage. Make sure there is no obstacle within rotation range. Please never power on before installation is completed.

- **Do not Dismantle the Camera**

We are not responsible for any unauthorized modification or dismantling.









Warning Specific frequencies of electromagnetic field may affect the image of the camera!

2. Packing List



When unpacking the package, check that all the supplied accessories are included:

Name	Quantity
MAXHUB UC P15	1
Power Adapter	1
USB 3.0 Cable	1
Remote Control	1
Lens Cover	1
Quick Start Guide	1
Wall-mounted Kit	1

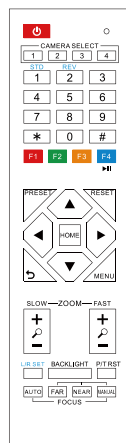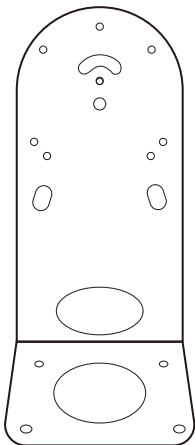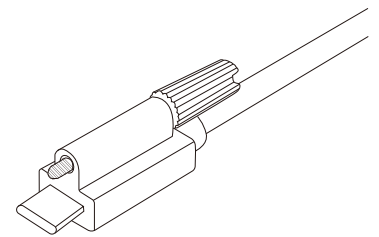

3. Quick Start

(1) Please check connections are correct before starting.

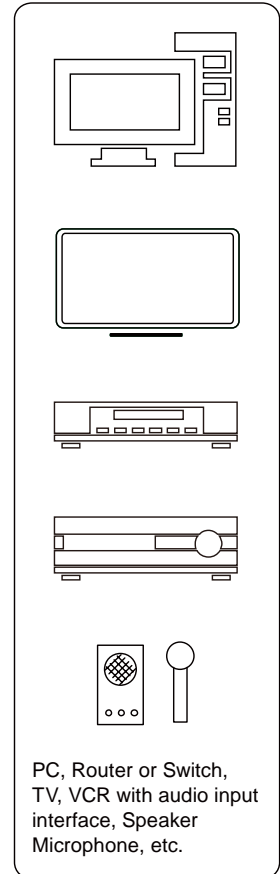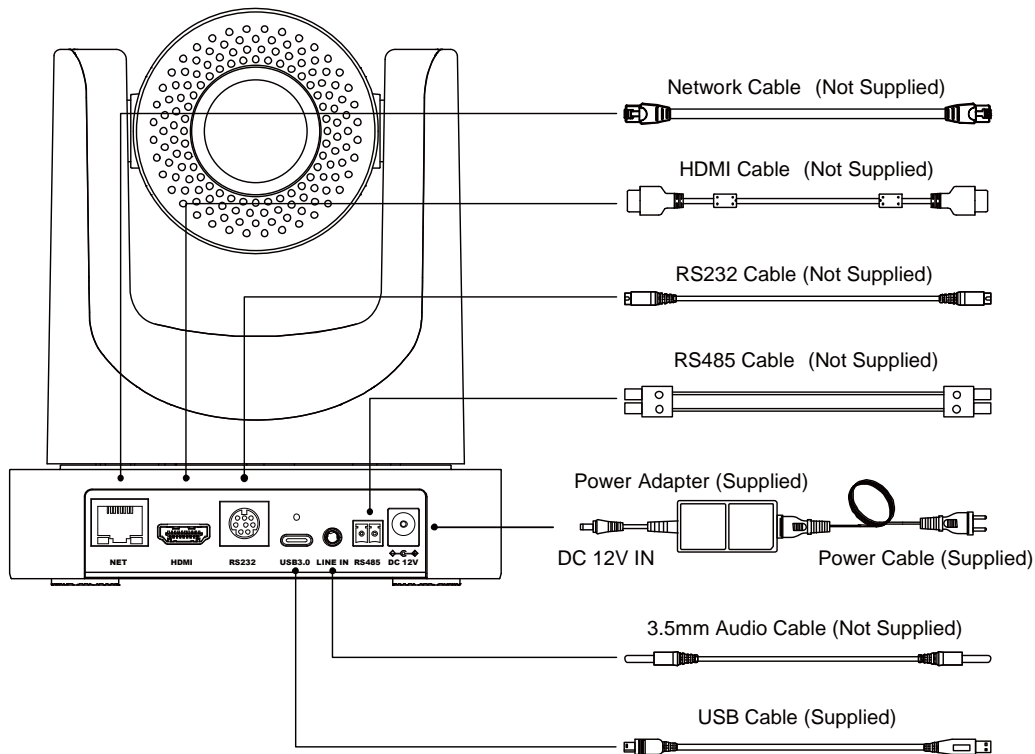

(2) Connect the power adapter to the power connector on the rear panel of the camera. The power indicator on the front panel of the camera turns on.

(3) After the camera is powered on, it starts to initialize, upper right turns to the limit position, and then the horizontal and vertical turn to the middle position. When the motor stops running, it means that the initialization is completed.

(Note: If preset 0 is saved, the PTZ will turn to preset 0).

4. About Product

4.1 Features

- **Full Function USB Interface**

Full function USB interface, compatible with USB 3.0 and USB 2.0, support audio and encoding output, and support the UVC V1.1 protocol.

- **1080P Full HD**

High-quality HD CMOS sensor with 2.07 million effective pixels for high-quality images up to 1920x1080.

- **72.5° Wide-angle-lens +16x Digital Zoom**

The exclusively customized 72.5° high-quality ultra-wide-angle lens, support 12x optical zoom and 16x digital zoom.

- **Low Illumination**

The new CMOS image sensor with ultra-high SNR can effectively reduce the image noise under low illumination. The application of 2D and 3D noise reduction algorithm greatly reduces the image noise even under the condition of ultra-low illumination, it keeps the picture clean and clear, and the SNR of image is as high as 55dB.

- **PoE**

The wired network supports PoE power supply, the control, power supply, video and audio can be completed with a network cable.

- **Remote Control**

The camera can be controlled remotely through the RS232, RS485, network and USB port.

- **H.264 Slice/H.264 SVC**

The H.264 stream supports Slice and SVC encoding modes, and suitable for high-end USB conference video applications.

- **Dual Stream**

Support two stream output (YUY2, MJPEG, H.264 each of both) to reduce the host codec pressure.

- **Multiple & Complete Interfaces**

Support 1080P video output through HDMI, USB 3.0 and network simultaneously.

- **Three Power Supply Modes**

Simultaneously support USB 5V, 12V power adapter and PoE power supply.

- **High Frame Rate**

1080P output frame rate up to 60fps.


4.2 Product Specification

Name	MAXHUB UC P15	Network Features	
Camera		Video Compression	H.264/MJPEG
Video System	1080P/60, 1080P/50, 1080/P30, 1080P/25, 720P/60, 720P/50	Video Stream	First Stream, Second Stream
Sensor	1/2.8 inch, CMOS, Effective Pixel: 2.07M	Sensor	1920x1080, 1280x720, 1024x576, 960x540, 640x480, 640x360
Scanning Mode	Progressive	Second Stream Resolution	1280x720, 1024x576, 720x576 (50Hz), 720x480 (60Hz), 720x408, 640x360, 480x272, 320x240, 320x180
Lens	12x, f=3.5mm ~ 42.3mm, F1.8 ~ F2.8	Video Bit Rate for First Stream	32Kbps ~ 20480Kbps
Digital Zoom	16x	Video Bit Rate for Second Stream	32Kbps ~ 6144Kbps
Minimum Illumination	0.5 Lux @ (F1.8, AGC ON)	Bit Rate Control	CBR, VBR
Shutter	1/30s ~ 1/10000s	Frame Rate	50Hz: 1fps ~ 50fps, 60Hz: 1fps ~ 60fps
White Balance	Auto, Indoor, Outdoor, One Push, Manual, VAR	Audio Type	AAC
Backlight Compensation	Support	Audio Bit Rate	96Kbps, 128Kbps, 256Kbps
Digital Noise Reduction	2D & 3D Digital Noise Reduction	Protocols	TCP/IP, HTTP, RTSP, RTMP(S), ONVIF, DHCP, Multicast, etc.
Signal Noise Ratio	≥55dB		
Horizontal Angle of View	72.5° ~ 6.9°		
Vertical Angle of View	44.8° ~ 3.9°		
Horizontal Rotation Range	±170°		
Vertical Rotation Range	-30° ~ +90°		
Pan Speed Range	2.7° ~ 35.7°/s		
Tilt Speed Range	2.7° ~ 31.5°/s		
H & V Flip	Support		
Image Freeze	Support		
Number of Preset	255		
Preset Accuracy	0.1°		

USB Features		Input/Output Interface	
Operate System	Windows 7, Windows 8, Windows 10, Mac OS X, Linux, Android	Network Interface	1 x NET: 10M/100M Adaptive Ethernet Port
Color System / Compression	MJPEG/YUY2/H.264	USB Interface	1 x USB 3.0: Type-C
Video Format	<ul style="list-style-type: none"> ▪ YUY2: 1080P@60fps (max.) ▪ H.264 AVC: 1080P@60fps (max.) ▪ H.264 SVC: 1080P@60fps (max.) ▪ MJPEG: 1080P@60fps (max.) 	LINE IN Interface	1 x LINE IN: 3.5mm Audio Interface
USB Audio	Support	Communication Interface	1 x RS232: 8pin Min DIN, Max. Distance: 30m, Protocol: VISCA/Pelco-D/Pelco-P
USB Video Communication Protocol	UVC 1.1		1 x RS485: 2pin phoenix port, Max. Distance: 1200m, Protocol: VISCA/Pelco-D/Pelco-P
UVC PTZ	Support	HDMI Output Interface	1 x HDMI 1.4b
		Power Jack	JEITA type (DC IN 12V) /USB Type-C (DC IN 5V) /PoE




Physical Parameter	
Input Voltage	DC 12V/DC 5V /PoE (802.3af)
Current Consumption	12V 1.0A (max.) /5V 1.5A (max.)
Operating Temperature	-10°C ~ 40°C
Storage Temperature	-40°C ~ 60°C
Power Consumption	12W (max.)
MTBF	>30000h
Size (mm)	144 x 144 x 166.9
Net Weight	1.4Kg

4.3 Interfaces and Buttons

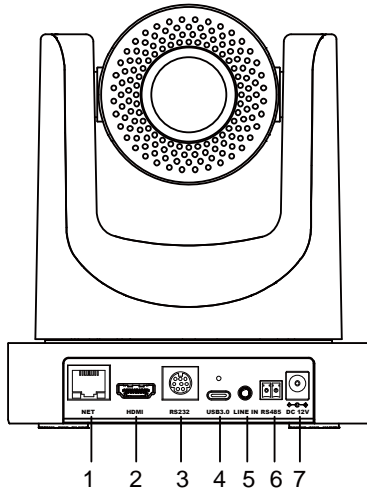


Item	Name
1	Network Interface
2	HDMI Interface
3	RS232 Interface
4	USB 3.0 Interface
5	LINE IN Interface
6	RS485 Interface
7	DC 12V Interface

4.4 Dimension

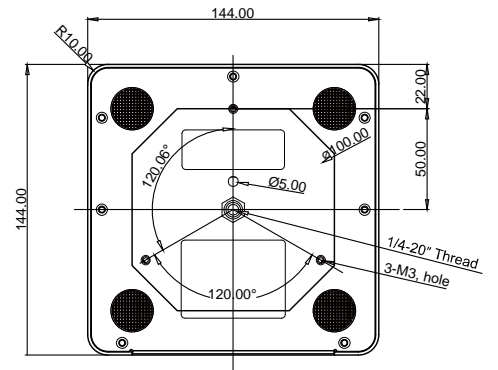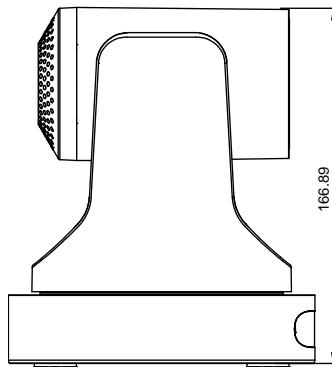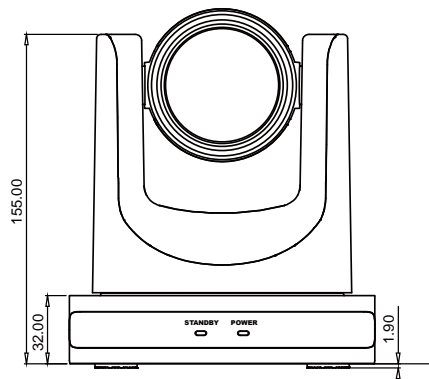

4.5 Remote Control

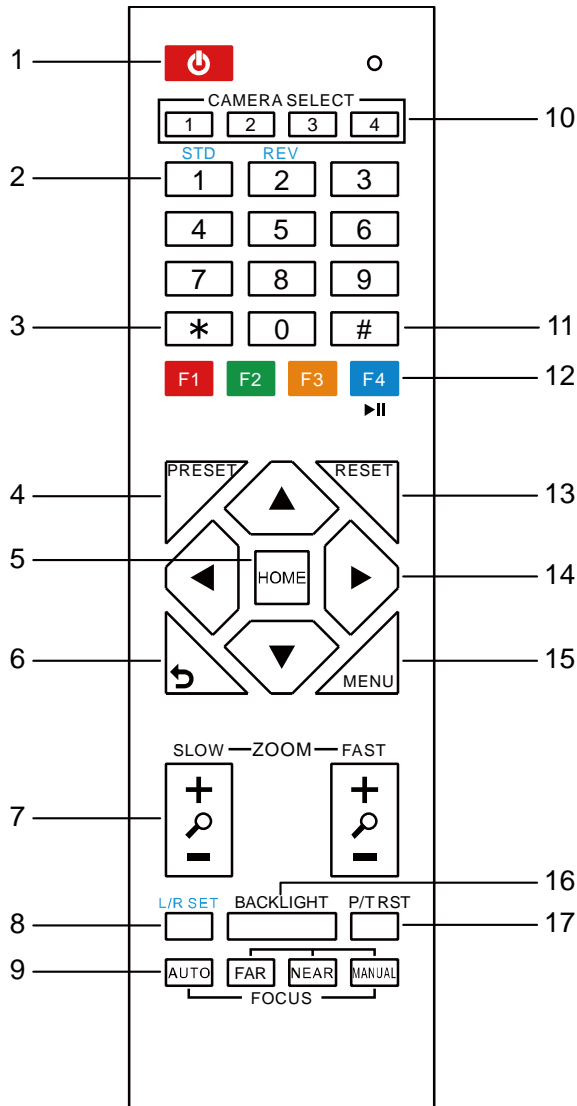


Key Description	
1. ⏻ (Standby) Key	Press to enter standby mode. Press again to resume to normal mode. Note: The power consumption in standby mode is approximately half of that in normal mode.
2. Number Key	To set preset or call preset.
3. * Key	Use with other keys.

4. PRESET Key	Set preset: Store a preset position.[PRESET] + Number key (0-9): Set a corresponding preset position.
5. HOME Key	Confirm selection or press to turn PTZ back to the middle position.
6. ↵ (Return) Key	Press to return to the previous menu.
7. ZOOM Key	<ul style="list-style-type: none"> ▪ SLOW: Zoom In [+] or Zoom Out [-] slowly. ▪ FAST: Zoom In [+] or Zoom Out [-] fast.
8. L/R SET Key	Press with 1 or 2 key to set the direction of the Pan-Tilt. <ul style="list-style-type: none"> ▪ Simultaneously press L/R SET + 1 [STD]: Set the Pan-Tilt turn the same direction as the PTZ control key. ▪ Simultaneously press L/R SET + 2 [REV]: Set the Pan-Tilt turn the opposite direction as the PTZ control key.
9. FOCUS Key	Focus adjustment: Press [AUTO] to adjust the focus automatically. Press [MANUAL] to adjust the focus manually. When in manual focus mode, press [FAR] to focus on far object or [NEAR] to focus on near object.
10. CAMERA SELECT Key	Camera selection: Press to select and control the camera.
11. # Key	Use with other keys
12. IR Remote Control Key	[*] + [#] + [F1]: Address 1 [*] + [#] + [F2]: Address 2 [*] + [#] + [F3]: Address 3 [*] + [#] + [F4]: Address 4

13. RESET Key
Clear the preset position: [RESET] + Number key (0-9). Or: [*] + [#] + [CLEAR PRESET]: Erase all the preset individually.
14. PTZ Control Key
Press arrow button to perform panning and tilting. Press [HOME] button to face the camera back to front.
15. MENU Key
Enter or exit OSD MENU.
16. BACKLIGHT Key
Backlight ON/OFF: Press repeatedly to enable or disable the backlight compensation. NOTE: <ul style="list-style-type: none"> ▪ Effective only in auto exposure mode. ▪ If there is a light behind the subject, the subject will become dark, press the backlight key to enable the backlight compensation. Press again to disable this function.
17. P/T RST (PTZ Reset) Key
Press to preset Pan/Tilt self-test.
18. Image Freezing Function
<ul style="list-style-type: none"> ▪ Manual freeze: Press the [F4] key to open the freezing function, "Freeze" will be displayed on the left upper corner. To cancel the freeze function, press [F4] key again, "Unfreeze" shows on the left upper corner and it will be disappeared automatically five seconds later. ▪ Image freeze when recalling the preset: After enable the "Image Freeze" function by the OSD menu setting, the screen will remain the previous image when recalling the preset. The screen will switch to the preset image after the camera turn to the preset position.
19. Shortcut Set
[*] + [#] + [1]: OSD menu default English [*] + [#] + [3]: OSD menu default Chinese

[*] + [#] + [4]: Display current IP address
[*] + [#] + [6]: Quickly recover the default
[*] + [#] + [8]: View the camera version
[*] + [#] + [9]: Quickly set up inversion
[*] + [#] + [MANUAL]: Restore to default IP address.

4.6 RS232 Interface



No.	Function
1	DTR
2	DSR
3	TXD
4	GND
5	RXD
6	GND
7	IR OUT
8	NC

The correspondence between the camera and Windows DB-9 pin:

Camera	Windows DB-9
1. DTR	1. CD
2. DSR	2. RXD
3. TXD	3. TXD
4. GND	4. DTR
5. RXD	5. GND
6. GND	6. DER
7. IR OUT	7. RTS
8. NC	8. CTS
	9. RI

The correspondence between the camera and the Mini DIN pin:

Camera	Windows DB-9
1. DTR	1. DTR
2. DSR	2. DSR
3. TXD	3. TXD
4. GND	4. GND
5. RXD	5. RXD
6. GND	6. GND
7. IR OUT	7. NG
8. NC	8. BG

4.7 Serial Communication Control

• **RS232 Communication Control**

Camera controlled via RS232. The RS232 serial port parameters are as follows:

Baud rate: 2400/4800/9600/38400

Starting Position: 1 bit

Data bits: 8 bits

Stop bits: 1 bit

Parity: None

• **RS485 Communication Control**

Camera controlled via RS485, half duplex mode:

Baud rate: 2400/4800/9600/38400

Starting position: 1 bit

Data bit: 8 bits

Stop bit: 1 bit

Check digit: None

After power on, the camera goes to the upper right limit and then back to the middle position. The lens pulled to the farthest position (auto focus) and the aperture will be adjusted to the default value. If preset 0 is saved, the PTZ will be turn to position 0 after the initialization is completed. Use the serial port command to control the camera.

• List of protocols (omitted)

The serial port of the camera follows the VISCA/Pelco-D/Pelco-P standard protocol. If secondary development is required, the camera can be controlled according to the standard protocol.

For a detailed list of VISCA/Pelco-D/Pelco-P protocols, please contact with manufacturer.

5. GUI Settings

5.1 MENU

Press [MENU] key to display the main menu on the screen. Use the arrow key to move the cursor to desired item and press the [HOME] key to confirm to enter the corresponding sub-menu.

MENU	
▶	Exposure
	Color
	Image
	P/T/Z
	Noise Reduction
	Setup
	Communication Setup
	Restore Default
	[Home] Enter
	[Menu] Exit

5.2 EXPOSURE

When in main menu page, move the cursor to [Exposure] and press [HOME] key to confirm to enter the exposure page as shown in below figure.

EXPOSURE		
▶	Mode	Auto
	ExpCompMode	On
	ExpComp	-1
	Backlight	Off
	Gain Limit	3
	Anti-Flicker	50HZ
	Meter	Average
	DRC	2
	▲ ▼ Select Item	
	◀ ▶ Change Value	
	[Menu] Back	

Mode: Auto, Manual, SAE, AAE, Bright.

ExpCompMode (Exposure Compensation Mode): On, Off (Effective only in Auto mode).

ExpComp (Exposure Compensation Value):

-7 ~ +7 (Effective only in ExpCompMode On).

Backlight: On, Off (Effective only in Automode).

Bright: 0~17 (Effective only in Bright mode).

Gain Limit: 0 ~ 15 (Effective in Auto, SAE, AAE, Bright mode).

Anti-Flicker: Off, 50Hz, 60Hz (Effective in Auto, AAE, Bright mode).

Meter: Average, Center, Smart, Top (Effective in Auto, SAE, AAE, Bright mode).

Iris: F1.8, F2.0, F2.4, F2.8, F3.4, F4.0, F4.8, F5.6, F6.8, F8.0, F9.6, F11.0, Close (Effective in Manual, AAE mode).

Shutter: 1/30, 1/60, 1/90, 1/100, 1/125, 1/180, 1/250, 1/350, 1/500, 1/725, 1/1000, 1/1500, 1/2000, 1/3000, 1/4000, 1/6000, 1/10000 (Effective in Manual, SAE mode).

Gain: 0 ~ 7 (Effective only in Manual mode).

DRC: 0 ~ 8.

5.3COLOR

When in main menu page, move the cursor to [Color] and press [HOME] key to confirm to enter the color page as shown in below figure.

COLOR		
▶	WB Mode	Auto
	RG Tuning	+1
	BG Tuning	+1
	Saturation	100%
	Hue	7
	AWB Sens	High
	▲ ▼ Select Item	
	◀ ▶ Change Value	
	[Menu] Back	

WB-Mode (White Balance Mode): Auto, Indoor, Outdoor, One Push, Manual, VAR.

RG Tuning (Red Gain Tuning): -10 ~ +10 (Effective only in Auto, One Push, VAR mode).

BG Tuning (Blue Gain Tuning): -10 ~ +10 (Effective in Auto, One Push, VAR mode).

Saturation: 60% ~ 200%.

Hue: 0 ~ 14.

AWB Sens (The White Balance Sensitivity): Low, Middle, High (Effective in Auto, One Push mode).

RG (Red Gain): 0~255 (Effective only in Manual mode).

BG (Blue Gain): 0~255 (Effective only in Manual mode).

Color Temp: 2500K ~ 8000K (Effective only in VAR mode).

5.4 IMAGE

When in main menu page, move the cursor to [Image] and press [HOME] key to confirm to enter the image page as shown in below figure.

IMAGE		
▶	Luminance	7
	Contrast	7
	Sharpness	4
	Flip-H	Off
	Flip-V	Off
	B&W-Mode	Off
	Gamma	Ext
	Style	Default
	▲ ▼ Select Item	
	◀ ▶ Change Value	
	[Menu] Back	

Luminance: 0 ~ 14.

Contrast: 0 ~ 14.

Sharpness: Auto, 0 ~ 15.

Flip-H: On, Off.

Flip-V: On, Off.

B&W-Mode: On, Off.

Gamma: Ext, Default, 0.45, 0.5, 0.56, 0.63.

Style: Default, Norm, Clarity, Bright, PC.

5.5 P/T/Z

When in main menu page, move the cursor to [P/T/Z] and press [HOME] key to confirm to enter the P/T/Z page as shown in below figure.

P/T/Z		
▶	SpeedByZoom	On
	AF-Zone	Front
	AF-Sense	High
	Display Info	On
	Image Freeze	Off
	Digital Zoom	Off
	Call Preset Speed	22
	Pre Zoom Speed	5
	▲ ▼ Select Item	
	◀ ▶ Change Value	
	[Menu] Back	

SpeedByZoom (The Depth of Field Ratio): On, Off.

AF-Zone (Auto Focus Area): Front, Top, Center, Bottom.

AF-Sense (Auto Focus Sensitivity): Low, Normal, High.

Display Info: On, Off.

Image Freeze: On, Off.

Digital Zoom: Off, 2x, 4x, 8x, 16x.

Call Preset Speed: 1 ~ 24.

Pre Zoom Speed: 0 ~ 7.

5.6 NOISE REDUCTION

When in main menu page, move the cursor to [Noise Reduction] and press [HOME] key to confirm to enter the noise reduction page as shown in below figure.

NOISE REDUCTION		
▶	NR2D-Level	Auto
	NR3D-Level	Auto
	▲ ▼ Select Item	
	◀ ▶ Change Value	
	[Menu] Back	

NR2D Level (2D Noise Reduction): Auto, Off, 1 ~ 5.

NR3D Level: (3D Noise Reduction): Auto, Off, 1 ~ 8.

5.7 SETUP

When in main menu page, move the cursor to [Setup] and press [HOME] key to confirm to enter the setup page as shown in below figure.

SETUP		
▶	Language	EN
	Video Format	1080P30
	USB Mode	ISOC
	OSD Flip	Off
	USB Audio	On
	UVC H264	On
	▲ ▼ Select Item	
	◀ ▶ Change Value	
	[Menu] Back	

Language: EN, Chinese, Russian.

USB Format: 1080P60, 1080P50, 1080P30, 1080P25, 720P60, 720P50.

USB Mode: BULK, ISOC.

OSD Flip: On, Off.

USB Audio: On, Off.

UVC H264: On, Off.

5.8 COMMUNICATION SETUP

When in main menu page, move the cursor to [Communication Setup] and press [HOME] key to confirm to enter the communication setup page as shown in below figure.

COMMUNICATION SETUP		
▶	Protocol	VISCA
	V_Address	1
	V_AddrFix	Off
	Net Mode	Serial
	Baudrate	9600
	▲ ▼ Select Item	
	◀ ▶ Change Value	
	[Menu] Back	

Protocol: Auto, VISCA, PELCO-D, PELCO-P.

V_Address: 1 ~ 7 (Effective in Auto, VISCA protocol).

V_AddrFix: On, Off (When set to On, the 88 30 01 FF command does not work. Effective in Auto and VISCA protocol).

P_D_Address: 0 ~ 254. (Effective in Auto, PELCO-D protocol).

P_P_Address: 0 ~ 31. (Effective in Auto, PELCO-P protocol).

Net Mode: Serial, Paral (Effective in Auto, VISCA protocol).


Baudrate: 2400, 4800, 9600, 38400.


5.9 RESTORE DEFAULT

When in main menu page, move the cursor to [Restore Default] and press [HOME] key to confirm to enter the restore default page as shown in below figure.

RESTORE DEFAULT		
▶	Restore?	No
	◀ ▶ Change Value	
	[Home] OK	
	[Menu] Back	

Restore: Yes, No.

 **Notice** When selected “Yes” and confirm with [HOME] key, all parameters will restore to default, include the IR Remote address and VISICA address

 **Note** GUI menu and parameters are subject to change without notice.

6. Network Function

6.1 Operating Environment

Operating System: Windows 7, Windows 8, Windows 10, Mac OS X, Linux, Android.


Network Protocol: TCP/IP

PC Configuration: P4/128M RAM/40G HDD support scaled graphics card, support DirectX 8.0 or more advanced version.


6.2 Equipment Installation

- (1) Connect the camera to the network or connect it directly to the PC with a network cable.
- (2) Power on Camera.
- (3) When the network connection in normal condition, the connect indicator at network interface will light up and the data indicator will flash to indicating that the physical connection of the camera has been completed.

6.3 Internet Connection

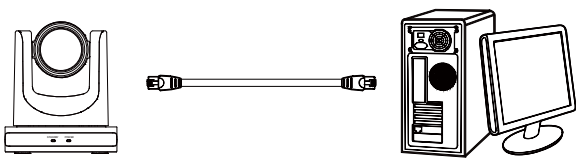

Connect by Network Cable

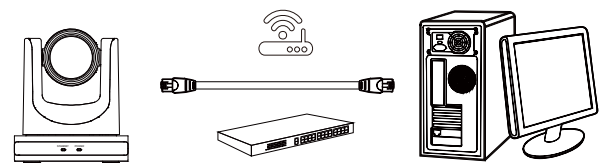

Connect by Switch/Router

6.4 Camera Controlled by LAN

6.4.1 Setup IP Address

The factory default IP is: 192.168.100.88, If you don't know the camera IP, check it as below:

Method 1: Press * and # and 4 on remote control one by one, the camera IP address will be shown on screen.

Method 2: Connect the camera to PC with network cable, check the IP address with "upgrade_En.exe".



upgrade


Change IP address, two methods as below:

Method 1: Input the IP address, username and password to login the web page, select “Network > Lan Settings” to change the IP address. Click “Submit” and restart the camera to take effect the new IP address.

The screenshot displays the configuration page for a camera, organized into several sections:

- Lan Settings:** IP Configuration Type (Fixed IP Address), IP Address (192.168.100.88), Subnet Mask (255.255.255.0), Gateway (192.168.100.1), DNS Address (8.8.8.8), and MAC Address (D4 E0 8E BD 00 D6). Includes Submit and Cancel buttons.
- Port Settings:** HTTP Port (80), RTSP Port (554), TCP Port (5678), UDP Port (1259), and Sony Visca (52381).
- RTMP(S) Settings:** First Stream (On/Off, Video/Audio), MRL (rtmp://192.168.100.138/live/stream0), Second Stream (On/Off, Video/Audio), MRL (rtmp://192.168.100.138/live/stream1).
- SRT Settings:** SRT (On/Off), SRT Port (4578), SRT Encryption (None), SRT Password (1234567890).
- RTSP Settings:** RTSP Auth (On/Off).
- ONVIF Settings:** ONVIF (On/Off), ONVIF Auth (On/Off).
- Multicast Settings:** Multicast (On/Off), Address (224.1.2.3), Port (6688).
- NTP Settings:** NTP time sync (On/Off), Time Zone ((GMT+08:00) Beijing, Chn), Server address (cn.ntp.org.cn), Time interval(min) (1440), Main time show (On/Off), Position (X: 0, Y: 0), Sub time show (On/Off), Position (X: 0, Y: 0). Includes Submit and Cancel buttons.

Method 2: Open “upgrade_en.exe”, Select the “Config” dialog, change IP Address and click “Set”. After modified, the video conference camera will be restart.

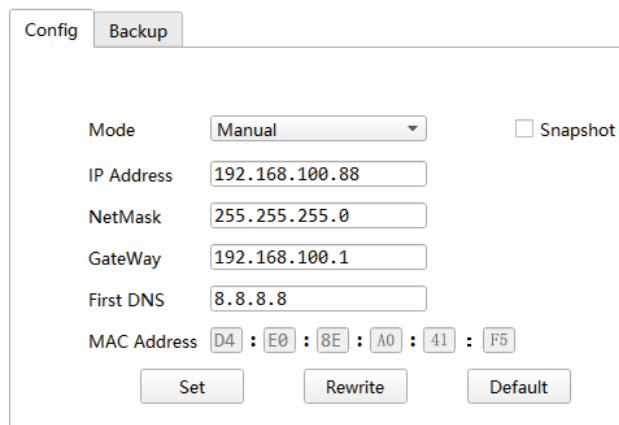

Change IP address:

Step 1 Search the IP address of camera.

Step 2 Select the camera IP that you want to change.

Step 3 Select the “Config” dialog of upgrade applets.

Step 4 Change the IP address, Netmask and Gateway, then click “Set”.

Step 5 Finish.

6.4.2 Visit/Access Camera

Visit <http://192.168.100.88> via IE (better with IE web browser, others will cause latency), the login window will pop up as below, input the username and password.



After login, it will show as below:



Tips

IE browser does not support H5, you need to use VLC plug-in to view videos. Please visit VLC website (<http://www.videolan.org/vlc>) to download and install the 32-bit VLC media player, after installation, the video image will be displayed normally when visit the camera. Other mainstream browsers already support H5 and do not need to install the VLC plug-in.


6.5 Camera Controlled by WAN

6.5.1 Setup IP Controlled by Dynamic DNS

Two dynamic DNS: DynDNS.org, 3322.org.

Router Port Mapping (Tenda):

Enter the Router Home Page (interface page), select “Advanced”- “Virtual Server” > enter a new port number in “Ext Port” > enter a new port number in “Int port” > enter the IP address to “Internal IP” > select “Save” as below:

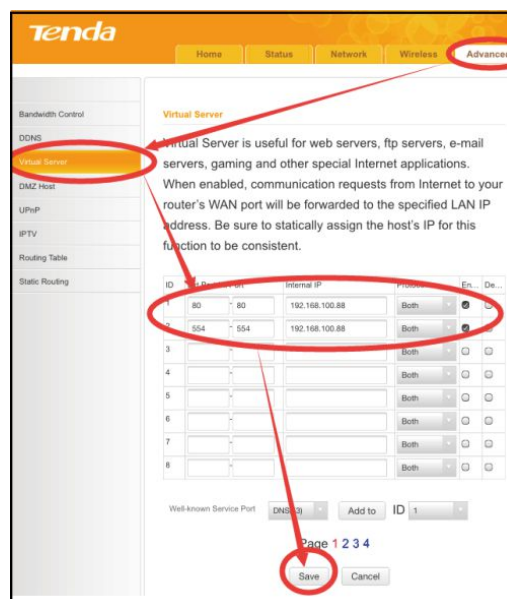

6.5.2 Camera Visiting via Dynamic DNS

Set domain name to camera, after configured the parameters, you can use the dynamic DNS to visit camera. Access link: `http://hostname: port number`. If the computer is: `youdomain.f3322.org`, and the camera port is 89, the access link should be `http://youdomain.3322.org:89`.




Tips

If the camera port is 80, you do not need to ---input port number, use the host name to access camera directly.

6.5.3 VLC Stream Media Player Monitoring Visit VLC Media Server Procedure

Step 1 Open VLC media player.

Step 2 Click “Media > Open Network Stream”, or click “Ctrl + N” as below:

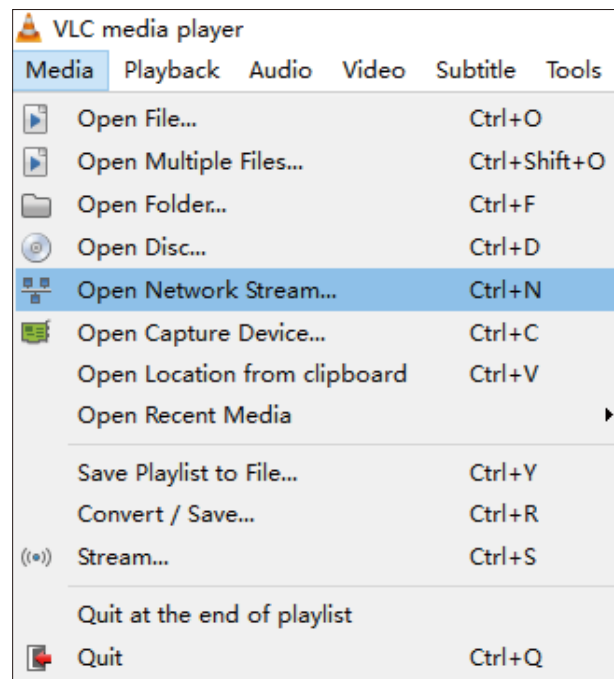

Step 3 Input URL address:


`rtsp://ip: port number/1` (First stream);

`rtsp://ip: port number/2` (Second stream).

Step 4 Finish.

Tips

The default RTSP port number is 554.

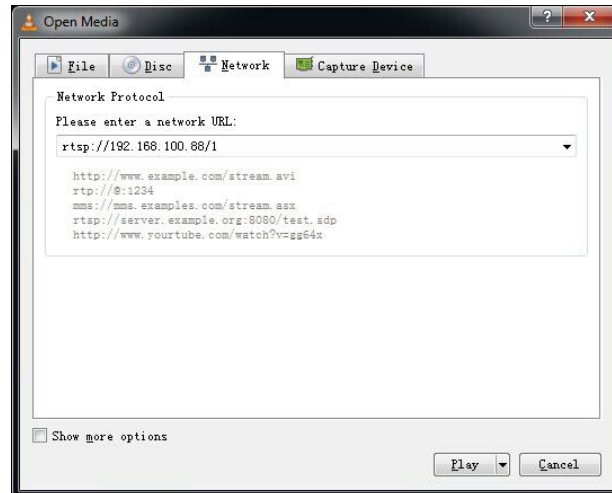

6.6 Camera Parameter Setup

6.6.1 Homepage Introduction

Menu

The interface includes below two menu bars: Real Time Monitoring: Video image displaying Parameter Setup: Configure the parameters.


A.Video Viewing Window

The video viewing window is same as video resolution, the bigger the resolution, the bigger the playing area. Double click the viewing window to show full screen, double click again to return to initialized size. The status bar in viewing window is shown as below:



- (1) Video Pause: Click to pause the real-time video, click again to resume.
- (2) Full screen switch button.

B. PTZ Setup

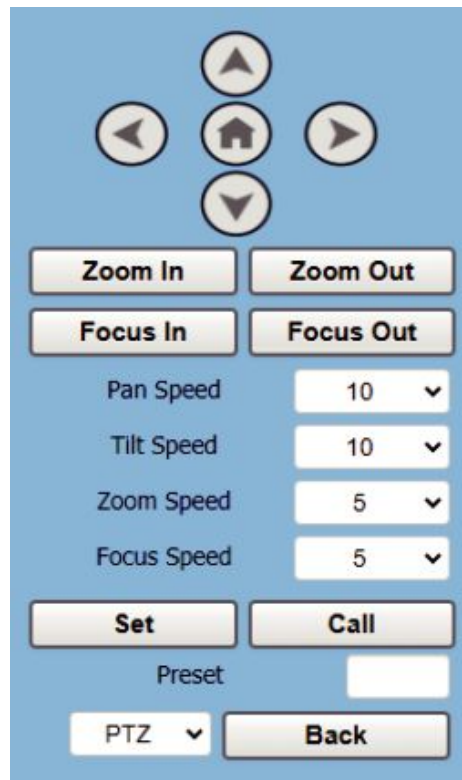

(1) Pan and Tilt Control

The Up, Down, Left and Right arrow and HOME button allow you to manually drive the camera to the desired position.

(2) Zoom

Zoom In and Zoom Out button allow for wide or narrow view of the space.

(3) Focus

Focus In and Focus Out button allow for fine manual focus adjustment if the camera has any auto focusing problems on difficult object.

(4) PTZ Speeds

Pan speed rate can be set to 1 ~ 24, Tilt speed rate can be set to 1 ~ 20. Zoom and Focus speed rate can be set to 0 ~ 7.

(5) PTZ Presets

When the PTZ turns to the position that you would like to return to later, you can set presets for quick recall.

Step 1 Type a number into the preset box.



Step 2 Click “Set” to save the preset.

When the PTZ turn to other position, input the preset number and click “Call” button to turn the PTZ back to the preset position.

(6) PTZ/OSD

Move the cursor to dropdown menu, select and click “OSD” to open the on-screen menu and do menu settings on the interface.

C.Language Selection

Click to select “Chinese”, “English” or “Russian” to change the language of the interface.



6.6.2 Video Settings

Video Settings

Video Format: 50Hz
Encode Level: mainprofile

First stream

Encode Codec: H264
Resolution: 1920x1080
Bit Rate: 4096
Frame Rate: 25 fps
I Key Frame Interval: 25
Bit Rate Control: CBR
Slice Split Enable: Off
Split Mode: Fixed bytes
Slice Size: 32 blocks/bytes

Second stream

Encode Codec: H264
Resolution: 320x240
Bit Rate: 1024
Frame Rate: 25 fps
I Key Frame Interval: 25
Bit Rate Control: CBR
Slice Split Enable: Off
Split Mode: Fixed bytes
Slice Size: 57600 blocks/bytes

Submit Cancel

(1) Video Format

Support 50Hz (PAL) and 60Hz (NTSC) formats.

(2) Encode Level

Support baseline, mainprofile and highprofile.

(3) Encode Codec

Support H264 and MJPEG.

(4) Resolution

First stream support 1920x1080, 1280x720, 1024x576, 960x540, 640x480, 640x360. Second stream support 1280x720, 1024x576, 720x576 (50Hz), 720x480 (60Hz), 720x408, 640x360, 480x272, 320x240, 320x180; The bigger the resolution, the clearer the image, and the larger the code stream, the more network bandwidth will be taken.

(5) Bit Rate

You can specify the bit rate, the larger of the bit rate, the clearer of the image. The configuration of the bit rate needs to be combined with the network bandwidth. When the network bandwidth is narrow and the bit rate is configured larger, the video stream cannot be transmitted normally, and the visual effect will be worse.

(6) Frame Rate

You can specify the size of the frame rate, the greater the frame rate, the smoother the image, the smaller the frame, the more sense of beating.

(7) I Key Frame Interval

Set the interval between two I frames, the bigger the interval, the slower the response when opening the image for the first time.

(8) Bit Rate Control

Two modes for bit rate control:

CBR (Constant Bit Rate): Video coder will be coding according to the preset speed.

VBR (Variable Bit Rate): Video coder will adjust the speed based on preset speed to gain the best image quality.

(9) Slice Split Enable

Enable or disable the Slice Split function.

(10) Split Mode

Split Mode Fixed bytes.

(11) Slice Size

Size for slice.

6.6.3 Image Settings



(1) Brightness

Image Bright: 0~14 (Controlled by the slide bar, the digital value displayed on the right). Default is 7.

(2) Saturation

Image Saturation: 0~14 (Controlled by the slide bar, the digital value displayed on the right). Default is 4.

(3) Contrast

Image Contrast: 0~14 (Controlled by the slide bar, the digital value displayed on the right). Default is 7.

(4) Sharpness

Image Sharpness: 0~16 (Controlled by the slide bar, the digital value displayed on the right). Default is 4.

(5) Hue


Image Hue: 0~14 (Controlled by the slide bar, the digital value displayed on the right). Default is 7.

(6) Flip & Mirror

Flip: Enable or disable the Flip function.

Mirror: Enable or disable the Mirror function.

6.6.4 Audio Settings

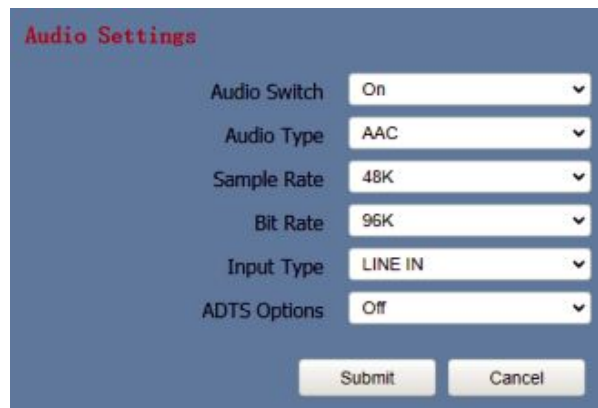

The screenshot shows the 'Audio Settings' configuration panel. It features several dropdown menus for configuration: 'Audio Switch' is set to 'On', 'Audio Type' is 'AAC', 'Sample Rate' is '48K', 'Bit Rate' is '96K', 'Input Type' is 'LINE IN', and 'ADTS Options' is 'Off'. At the bottom, there are 'Submit' and 'Cancel' buttons.

- (1) **Audio Switch:** Enable or disable audio switch.
- (2) **Audio Type:** Audio type AAC.
- (3) **Sample Rate:** Sample rate 48K.
- (4) **Bit Rate:** Bit rate 96K, 128K and 256K selectable.
- (5) **Input Type:** Input type Line in.
- (6) **ADTS Options:** Options: On, Off.

6.6.5 System Settings



The screenshot shows the 'Initialize' configuration panel. It has a 'Reboot' button. Below it, under the 'User' section, there are two sets of input fields: 'UserName' (with 'admin' entered) and 'Passwd' (with '****' and an eye icon), and 'Guest' (with 'guest' entered) and 'Passwd' (with '****' and an eye icon). At the bottom, there are 'Submit' and 'Cancel' buttons.

(1) Reboot

Click "Reboot" to restart system.

(2) Username and Password

Modify the password of username and guest (use letters and Numbers only).

6.6.6 Network Settings

Lan Settings

IP Configuration Type: Fixed IP Address

IP Address: 192.168.100.88

Subnet Mask: 255.255.255.0

Gateway: 192.168.100.1

DNS Address: 8.8.8.8

MAC Address: D4:E0:8E:BD:00:D6

Submit Cancel

Port Settings

HTTP Port: 80

RTSP Port: 554

TCP Port: 5678

UDP Port: 1259

Sony Visca: 52381

RTMP(S) Settings

First Stream: On Off Video Audio

MRL: rtmp://192.168.100.138/live/stream0

Second Stream: On Off Video Audio

MRL: rtmp://192.168.100.138/live/stream1

SRT Settings

SRT: On Off

SRT Port: 4578

SRT Encryption: None

SRT Password: 1234567890

RTSP Settings

RTSP Auth: On Off

ONVIF Settings

ONVIF: On Off

ONVIF Auth: On Off

Multicast Settings

Multicast: On Off

Address: 224.1.2.3

Port: 6688

NTP Settings

NTP time sync: On Off

Time Zone: (GMT+08:00) Beijing, Chn

Server address: cn.ntp.org.cn

Time interval(min): 1440

Main time show: On Off

Position: X 0 Y 0

Sub time show: On Off

Position: X 0 Y 0

Submit Cancel

(1) Lan Settings

The default IP address is 192.168.100.88, the MAC address cannot be modified.

(2) Port Settings

Set the HTTP, RTSP, TCP, UDP and Sony Visca port number of the camera.

A.HTTP Port

The IP address identifies a network device and multiple network programs can run on the device, each network program uses the network port for data transmission. The port setting on this page is to set up which port the WEB SERVER program uses to transmit. During port mapping, it needs to be consistent with the port number (default is 80).

B.RTSP Port

Set up the RTSP port, default is 554.

C.TCP Port

Set up the TCP port, default is 5678.

D.UDP Port

Set up the UDP port, default is 1259.

E.Sony Visca

Sony Visca 52381.

(3) RTMP(S) Settings

Set the MRL of RTMP(S) and select "on", "off", "video" and "audio" functions to enable or disable video and audio in the two streams.

(4) SRT Settings

Turn On/Off SRT and set up the SRT Port, Encryption and Password.

(5) RTSP Settings

Turn On/Off the RTSP Auth.

(6) ONVIF Settings

Turn On/Off the ONVIF and ONVIF Auth.

(7) Multicast Settings

Turn On/Off Multicast, set up the Multicast Address (default is 224.1.2.3) and Port (default is 6688; 6688 is the multicast port of the first stream and 6690 is the multicast port of the second stream).

(8) NTP Settings

Turn On/Off NTP time sync, Main time show and Sub time show; select the Time Zone; set up the Server address, Time interval and the Time Show Position of the two streams.

6.6.7 Device Information

Display the current device information as below figure.



Device ID	HD Camera
Device Type	G46.V
Software Version	SOC v9.0.32 - ARM 7.3.20S
Webware Version	v1.5.5

Submit Cancel



Note

The above information is for reference only, please refer to the real product for the actual specification.

6.7 Upgrade Firmware via MAXHUB Align

You can Visit <https://www.maxhub.com/> to download the Firmware and upgrade the Firmware via MAXHUB Align when connecting to your laptop with USB Cable.



Note

WEB interface and parameters are subject to change without notice.

7. Maintenance and Troubleshooting

Camera Maintains

- If camera will not be used for a long time, disconnect the AC power adapter from the AC outlet.
- Use soft cloth or tissue to clean the camera cover.
- Please use the soft dry cloth to clean the lens. If the camera is very dirty, clean it with diluted neuter detergent. Do not use any type of solvents, which may damage the surface.

Unqualified Working Environment

- Avoid shooting objects such as sunlight or light, etc.
- Do not operate the camera under unstable lighting conditions, otherwise the image will be flickering.
- Do not use the camera around powerful electromagnetic radiation, such as TV or radio transmitters, etc.

Troubleshooting Image

- Image jitters when the lens at the maximum multiple

- (1) Check that the camera installation position is stable.
- (2) Check that any vibrating machinery or object near the camera.

- There is no video image in browser

IE browser does not support H5, you need to use VLC plug-in to view videos. Please visit VLC website (<http://www.videolan.org/vlc>) to download and install the 32-bit VLC media player, after installation, the video image will be displayed normally when visit the camera. Other mainstream browsers already support H5 and do not need to install the VLC plug-in.

- Unable to access through the browser

- (1) Using PC to access the network to test that the network access can work properly to eliminate the network fault caused by cable and PC virus until the PC and camera can ping each other.
- (2) Disconnect the network, connect camera with PC separately and reset the IP address of PC if necessary.
- (3) Check that the IP address, subnet mask and gateway settings is correct.
- (4) Check that the MAC address is conflicts.
- (5) Check that the web port is modified, the default setting is 80.

- Forget the IP address or login passwordThe default IP address is: 192.168.100.88; the default username and password are: admin.

Control

- Remote control does not work

- (1) Check and replace with new batteries.
- (2) Check that the camera is in normal working mode.
- (3) Check the address key of remote control can match the camera.

- Serial port cannot control

- (1) Check the protocol, address and bit rate of the camara are consistent.
- (2) Check the control cable is properly connected.

MAXHUB

